



AUTROL®

Smart Pressure Transmitter with Diaphragm Seal



MODEL APT3100L

DUON System Co., Ltd.

298-29, GONDAN-RO, GUNPO-SI, GYEONGGI-DO, KOREA 15809

Tel : +82-31-389-6100 Fax : +82-31-429-7200

E-mail: autrol@duon.co.kr, Web: www.autrol.com

APT3100L

AUTROL®

Smart Pressure Transmitter with Diaphragm Seal

Description of Product

The APT-3100L Smart Pressure Transmitter is a micro processor-based high performance transmitter, which has flexible pressure calibration and output, automatic compensation of ambient temperature and process variable, configuration of various parameters, communication with HART protocol. All Data of Sensor (Tag No., Type, Range) is to be input, modified and stored in EEPROM.

Features

- Superior Performance
 - High Reference Accuracy :
 $\pm 0.075\%$ of Calibrated Span (without seal)
 - Long-Term Stability
 - High Rangeability (100 : 1)
- Flexibility
 - Data Configuration with HART Configurator
 - Zero Point Adjustment
- Reliability
 - Continuous Self-Diagnostic Function
 - Automatic Ambient Temperature Compensation
 - Fail-mode Process Function
 - EEPROM Write Protection
 - CE EMC Conformity Standards (2004/108/EC: EN 61326-1:2006, EN 61326-2-3:2006)

Type of Sensor & Configure Tools

- Selection of Various Pressure
 - Using Capacitive Pressure Sensor
 - Screw type. Diaphragm Seal as to Process Connection method
 - User can select measuring sensor for DP, GP.
- Transmitter Output
 - Analog : 4 ~ 20mA DC
 - Digital : HART Digital Data.
- Configure Tools
 - Hand-Held Terminal :
portable use in job-site,
convenient input, change, review,
up-down loading
 - The Configurator Software Package
can be loaded on PC for users convenience

Hazardous Location Certification (Option)

- » KOSHA Approvals K1 Code :
 - * KOSHA: Korea Occupational Safety & Health Agency
Flameproof for Class I, Zone 1 : Ex d IIC T6, IP67
Ambient Temperature : -20 to 60°C
Max. Process Temperature : 80°C
Power Supply : Max. 45 Vdc
Output : 4 to 20 mA + HART, Max. 22 mA
- » ATEX Approvals E1 Code :
 - CE 0344 II 2 G Ex d IIC T6, T5 or T4
Operating  Temperature: -20°C ≤ Tamb ≤ +60°C
T6 for process ≤ 85°C ; T5 for process ≤ 100°C
T4 ≤ 130°C
APT3100 ATEX Certification is according to
the below standards : EN 60079-0 : 2006
EN 60079-1 : 2007
- » KTL Certification K2 Code :
 - * Intrinsic Safety: Ex ia IIC T6
Ambient Temperature : -40 to 60°C
Ui=30Vdc, Ii=200mA, Pi=0.9W, Ci=47nF, Li=94μH
- » FM and FM Canada Approvals F1 Code :
 - * FM: Factory Mutual explosion proof
 - * FM Canada: Canadian requirements Explosion proof
for Class I, Division 1 Groups A, B, C and D
Dust-ignition proof for Class II/III, Division 1,
Groups E, F and G
Nonincendive for Class I, Division 2, Groups A, B, C
& D; Class II, Division 2, Groups E, F & G;
and Class III, Division 1,
Enclosure: indoors and outdoors, NEMA Type 4X

APT3100L

AUTROL®


Smart Pressure Transmitter with Diaphragm Seal



Function

- Superior Performance
 - High Reference Accuracy : $\pm 0.075\%$ of Calibrated Span (without seal)
 - Long-Term Stability
 - High Rangeability (100 : 1)
- Flexibility
 - Data Configuration with HART Configurator
 - Zero Point Adjustment
- Reliability
 - Continuous Self-Diagnostic Function
 - Automatic Ambient Temperature Compensation
 - Fail-mode Process Function
 - EEPROM Write Protection
 - CE EMC Conformity Standards (2004/108/EC: EN 61326-1:2006, EN 61326-2-3:2006)

Functional Block Diagram

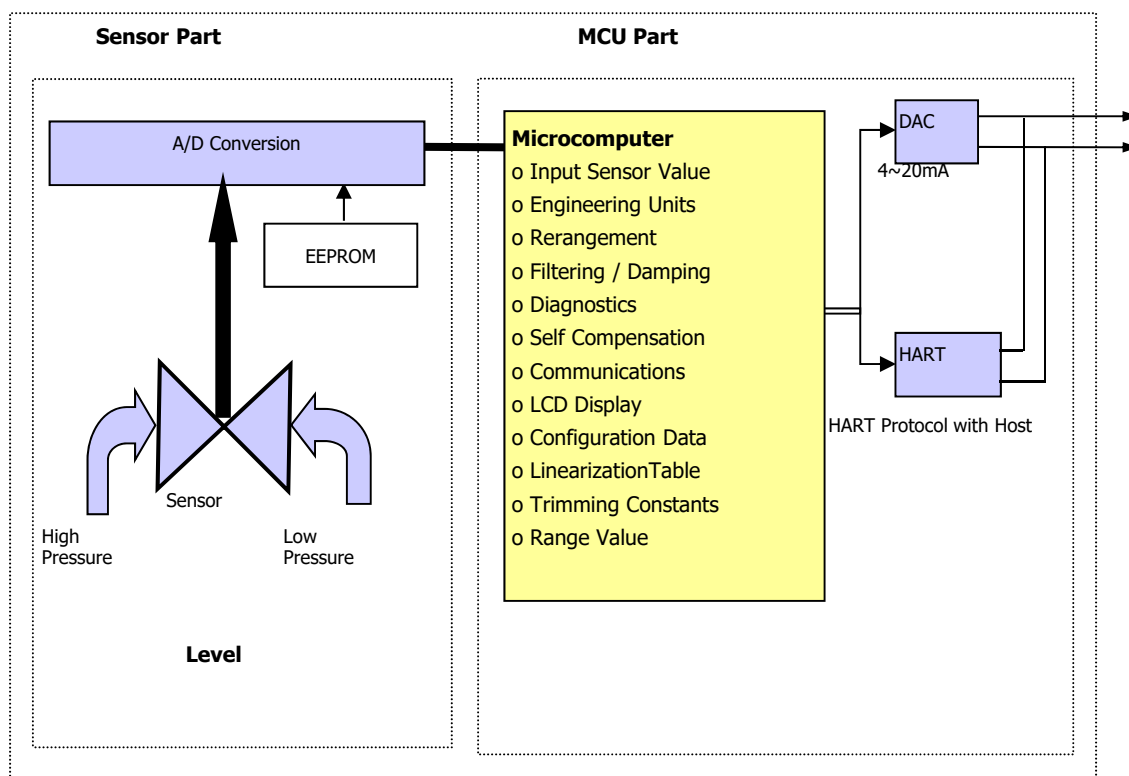

Smart Transmitter with Diaphragm Seal

General Specifications

1. Diaphragm Sealed Sensor Range (Rangeability : 20 : 1)

Class	Code	mmH2O	KPa
Low Level	4	0 ~ 194 to 0 ~ 3800	0 ~ 1.9 to 0 ~ 37.3
Medium Level	5	0 ~ 960 to 0 ~ 19000	0 ~ 9.4 to 0 ~ 186.5
High Level	6	0 ~ 3518 to 0 ~ 70000	0 ~ 34.5 to 0 ~ 690

2. Electrical Specifications

Power Supply	12 ~ 45 V dc	Output Signal	4 ~ 20 mA dc /HART
HART loop resistance	250 ~ 550 ohm	Isolation	500 Vrms (707V DC)
Update Time	0.25 Sec.	Turn-on Time	5 Sec.

3. Performance Specifications (without seal)

Reference Accuracy	$\pm 0.075\%$ of Span ($0.2URL \leq \text{Span} \leq URL$) $\pm [0.05 + 0.005 \times (URL/\text{Span})]\%$ of Span $(0.05URL \leq \text{Span} < 0.2URL)$	Operating Temp.	-40 ~ +85 °C
		LCD Meter Operating Temp.	-30 ~ +80 °C
		Humidity Limits	5% ~ 98% RH
Ambient Temp. Effect	$\pm [0.025\%URL + 0.125\% \text{ Span}]/28\text{ }^{\circ}\text{C}$	Process Temp. Limit	-40 ~ +120 °C
Stability	$\pm 0.1\%$ URL for 12 Months	Power Supply Effects	$\pm 0.005\%$ of Span per Volt
Static Pressure Effects	$\pm 0.1\%$ of URL per 7MPa (Zero Error) $\pm 0.2\%$ of Reading per 7Mpa (Span Error)	Mounting Position Effects	·Zero Shift up to 350Pa ·No Span Effect

4. Physical Specifications


Isolating Diaphragm	316L SST	Process Connection Size	1/2" - 14 NPT
Drain & Vent Valve	316 SST	Diaphragm Seal(Flush/Extended)	2" or 3" / 3" or 4"
Flange & Adapter	316 SST	Electrical Connections	1/2" – 14 NPT
O-ring	Viton, PTFE	Weight (only transmitter)	3.9 Kg
Electronic Housing	Aluminum	2" Pipe Stanchion Type bracket	Angle or Flat type
Bolts & Bolting Flange	316 SST	Housing Class	Waterproof (IP67, 4X)

5. Hazardous Location Certifications - Option

Korea Standards Approval	Overseas Standards Approval
KC Flameproof Approval KC Intrinsic Safety Approval	FM & FMc Explosion proof / Intrinsic Safety Approval (*) ATEX Flame proof / Intrinsic Safety Approval

Dimensional Drawing (mm)

For Flush Diaphragm Seal and Direct Mount Type Transmitter

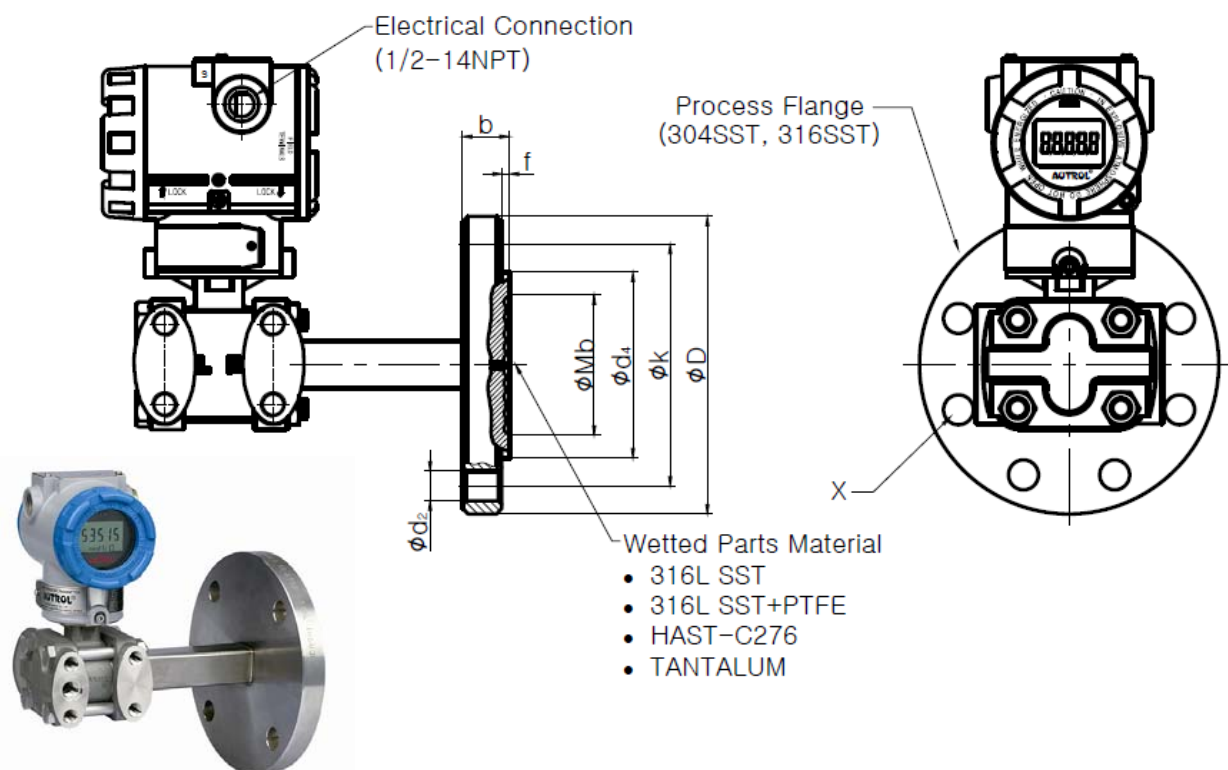

Flange Size: 100mm (4 inch)

Unit : mm

Flange Rating	Mb	D	b	d2	k	f	d4	X
ANSI Class 150	89	229	24	19	190	1.5	157	8
ANSI Class 300		254	32	22	200			
JIS 10K	89	210	18	19	175	2	157	8
JIS 20K		225	24	23	185			
DIN PN 10/16	89	220	20	18	180	3	157	8
DIN PN 25/40		235	24	22	190			

Flange Size: 80mm (3 inch)

Unit : mm

Flange Rating	Mb	D	b	d2	k	f	d4	X
ANSI Class 150	89	190	24	19	152.5	1.5	127	4
ANSI Class 300		210	29	22	168.5			8
JIS 10K	89	185	18	19	150	2	127	8
JIS 20K		200	22	23	160			
DIN PN 10/16	89	200	20	18	160	3	138	8
DIN PN 25/40			24	22				

Flange Size: 50mm (2 inch)

Unit : mm

Flange Rating	Mb	D	b	d2	k	f	d4	X
ANSI Class 150	61	152	19	19	120.5	1.5	92	4
ANSI Class 300		165	22		127			8
JIS 10K	61	155	16	19	120	2	96	4
JIS 20K			18					8
DIN PN 10/16	61	165	20	18	125	3	102	4
DIN PN 25/40								


Ordering Information

MODEL NO.	Code	Description					
APT3100	LFD	Flush Diaphragm Seal and Direct Mount Type Transmitter					
Ranges	4	0-194 to 0-3800mmH2O (0-1.9 to 0-37.3 KPa)					
	5	0-960 to 0-19000mmH2O (0-9.4 to 0-186.5 KPa)					
	6	0-3518 to 0-70000mmH2O (0-34.5 to 0-690 KPa)					
	X	Special					
Mounting Flange Size / Material		ANSI		DIN		JIS	
	S2	2-inch	SST	DN 50	SST	50 A	SST
	S3	3-inch	SST	DN 80	SST	80 A	SST
	S4	4-inch	SST	DN 100	SST	100 A	SST
	SX	Special	SST	Special	SST	Special	SST
Mounting Flange Rating		ANSI		DIN		JIS	
		A1	Class 150	D1	PN 10/16	J1	10 K
		A2	Class 300	D2	PN 25/40	J2	20 K
		A3	Class 600	-	-	-	-
		AX	Special	DX	Special	JX	Special
Wetted Parts Material Diaphragm / Others		DIAPHRAGM			OTHERS		
	S	316L SST			316L SST		
	P	316L SST + Teflon			316L SST		
	H	Hastelloy C-276			316L SST		
	T	Tantalum			316L SST		
	X	Special			Special		
Fill Fluid		FILL FLUID			TEMPERATURE LIMITS		
	2	D.C Silicone 200			-45 to 205 °C (-49 to 400 °F)		
	7	D.C Silicone 704			0 to 315℃ (32 to 600 °F)		
	X	Special			Special		
Materials of Construction	SS	FLANGE			VENT / DRAIN VALVE		
		316 SST			316 SST		
Low Side	W	Without Process Adapter					
	N	With 1/2"-14 NPT F Process Adapter (316 SST)					
	C	Closed					
	X	Special					
Electrical Connection	1	1/2"-14NPT F					
	2	G1/2					
	X	Special					
Hazardous Locations Certifications	K0	Maker Standard (Waterproof: IP67 / NEMA 4X)					
	K1	KCs Flameproof			*K2	KCs Intrinsic Safety	
	E1	ATEX Flameproof			E2	ATEX Intrinsic Safety	
	F1	FM & FM Canada Explosion proof			*F2	FM & FM Canada Intrinsic Safety	
Option	M1	LCD Indicator (5-Digit)			LPI	Lightning Protector (Internal)	
	K	Oil Free Finish			ST	Stainless Steel Housing	
	A	Vaccum Service			X	Special Order	

Note : Request to manufacturer for Draft Range, Absolute (Small Pressure and Vaccum) and items marked "*" before order.

Dimensional Drawing (mm)

For Extended Diaphragm Seal and Direct Mount Type Transmitter

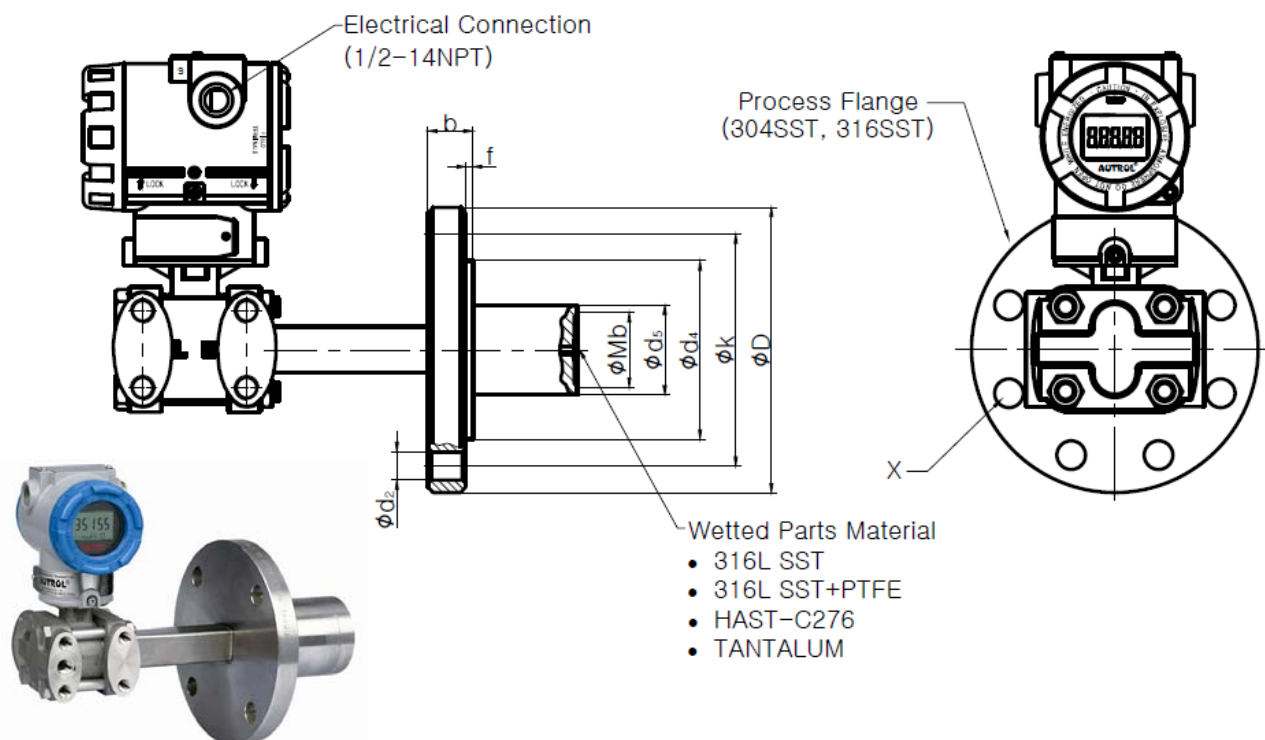

Flange Size: 100mm (4 inch)

Unit : mm

Flange Rating	Mb	D	b	d2	k	f	d4	d5	X
ANSI Class 150	89	229	24	19	190	1.5	157	89	8
ANSI Class 300		254	32	22	200				
JIS 10K	89	210	18	19	175	2	157	89	8
JIS 20K		225	24	23	185				
DIN PN 10/16	89	220	20	18	180	3	157	89	8
DIN PN 25/40		235	24	22	190				

Flange Size: 80mm (3 inch)

Unit : mm

Flange Rating	Mb	D	b	d2	k	f	d4	d5	X
ANSI Class 150	76	190	24	19	152.5	1.5	127	76	4
ANSI Class 300		210	29	22	168.5				8
JIS 10K	76	185	18	19	150	2	127	76	8
JIS 20K		200	22	23	160				
DIN PN 10/16	76	200	20	18	160	3	138	76	8
DIN PN 25/40			24	22					

Flange Size: 50mm (2 inch)

Unit : mm

Flange Rating	Mb	D	b	d2	k	f	d4	d5	X
ANSI Class 150	48	152	19	19	120.5	1.5	92	48	4
ANSI Class 300		165	22		127				8
JIS 10K	48	155	16	19	120	2	96	48	4
JIS 20K			18						8
DIN PN 10/16	48	165	20	18	125	3	102	48	4
DIN PN 25/40									


Ordering Information

MODEL NO.	Code	Description					
APT3100	LED	Extended Diaphragm Seal and Direct Mount Type Transmitter					
Ranges	4	0-194 to 0-3800mmH2O (0-1.9 to 0-37.3 KPa)					
	5	0-960 to 0-19000mmH2O (0-9.4 to 0-186.5 KPa)					
	6	0-3518 to 0-70000mmH2O (0-34.5 to 0-690 KPa)					
	X	Special					
Mounting Flange Size / Material		ANSI		DIN		JIS	
	S2	2-inch	SST	DN 50	SST	50 A	SST
	S3	3-inch	SST	DN 80	SST	80 A	SST
	S4	4-inch	SST	DN 100	SST	100 A	SST
	SX	Special	SST	Special	SST	Special	SST
Mounting Flange Rating		ANSI		DIN		JIS	
		A1	Class 150	D1	PN 10/16	J1	10 K
		A2	Class 300	D2	PN 25/40	J2	20 K
		A3	Class 600	-	-	-	-
		AX	Special	DX	Special	JX	Special
Extension Length	□□	□□ x 10 mm					
		Exp: 15 --> 150mm, 12--> 120mm					
Wetted Parts Material Diaphragm / Others		DIAPHRAGM			OTHERS		
	S	316L SST			316L SST		
	P	316L SST + Teflon			316L SST		
	H	Hastelloy C-276			316L SST		
	T	Tantalum			316L SST		
	X	Special			Special		
Fill Fluid		FILL FLUID			TEMPERATURE LIMITS		
	2	D.C Silicone 200			-45 to 205 °C (-49 to 400 °F)		
	7	D.C Silicone 704			0 to 315°C (32 to 600 °F)		
	X	Special			Special		
Materials of Construction	SS	FLANGE			VENT / DRAIN VALVE		
		316 SST			316 SST		
Low Side	W	Without Process Adapter					
	N	With 1/2"-14 NPT F Process Adapter (316 SST)					
	C	Closed					
	X	Special					
Electrical Connection	1	1/2"-14NPT F					
	2	G1/2					
	X	Special					
Hazardous Locations Certifications	K0	Maker Standard (Waterproof: IP67 / NEMA 4X)					
	K1	KCs Flameproof			*K2	KCs Intrinsic Safety	
	E1	ATEX Flameproof			E2	ATEX Intrinsic Safety	
	F1	FM & FM Canada Explosion proof			*F2	FM & FM Canada Intrinsic Safety	
Option	M1	LCD Indicator (5-Digit)			LPI	Lightning Protector (Internal)	
	K	Oil Free Finish			ST	Stainless Steel Housing	
	A	Vaccum Service			X	Special Order	

Note : Request to manufacturer for Draft Range, Absolute (Small Pressure and Vacuum) and items marked "" before order.

Dimensional Drawing (mm)

For Flush Diaphragm Seal and Capillary Type Transmitter

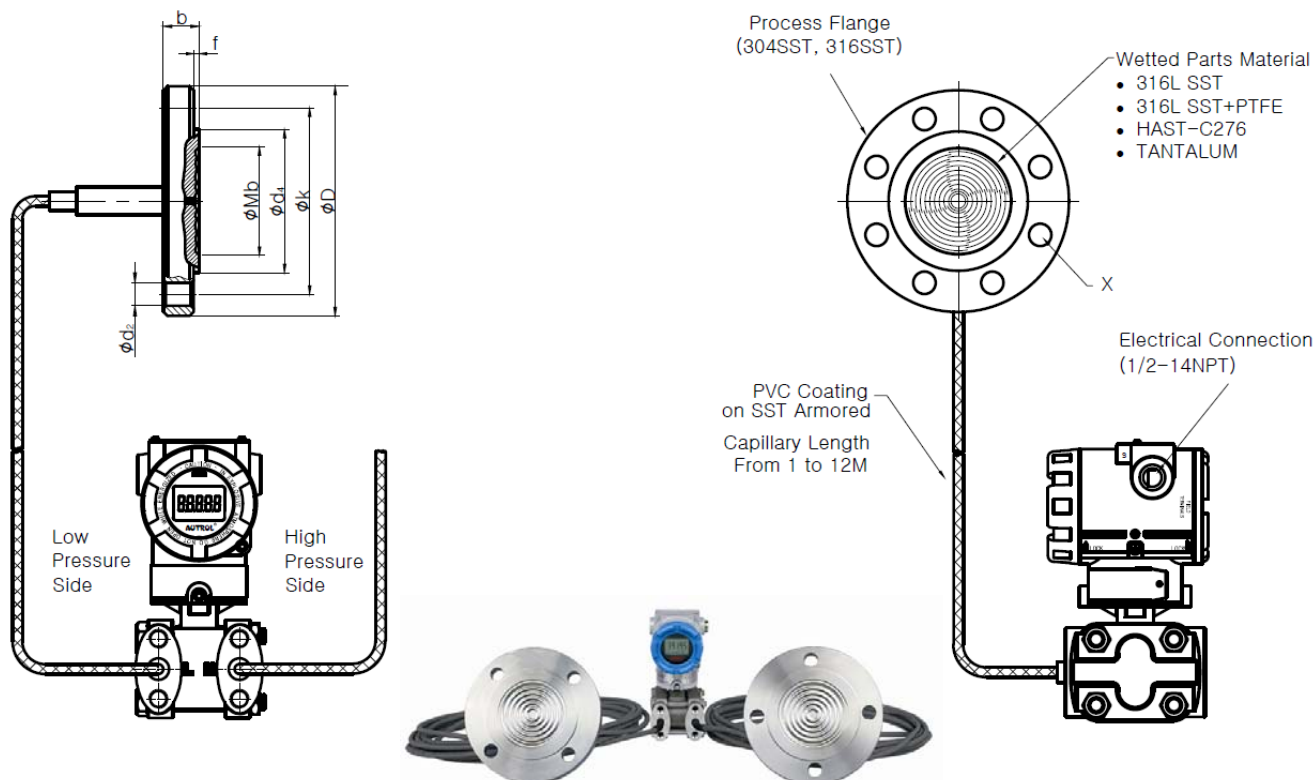

Flange Size: 100mm (4 inch)

Unit : mm

Flange Rating	Mb	D	b	d2	k	f	d4	X
ANSI Class 150	89	229	24	19	190	1.5	157	8
ANSI Class 300		254	32	22	200			
JIS 10K	89	210	18	19	175	2	157	8
JIS 20K		225	24	23	185			
DIN PN 10/16	89	220	20	18	180	3	157	8
DIN PN 25/40		235	24	22	190			

Flange Size: 80mm (3 inch)

Unit : mm

Flange Rating	Mb	D	b	d2	k	f	d4	X
ANSI Class 150	89	190	24	19	152.5	1.5	127	4
ANSI Class 300		210	29	22	168.5			8
JIS 10K	89	185	18	19	150	2	127	8
JIS 20K		200	22	23	160			8
DIN PN 10/16	89	200	20	18	160	3	138	8
DIN PN 25/40			24	22				

Flange Size: 50mm (2 inch)

Unit : mm

Flange Rating	Mb	D	b	d2	k	f	d4	X
ANSI Class 150	61	152	19	19	120.5	1.5	92	4
ANSI Class 300		165	22		127			8
JIS 10K	61	155	16	19	120	2	96	4
JIS 20K			18					8
DIN PN 10/16	61	165	20	18	125	3	102	4
DIN PN 25/40								


Ordering Information

MODEL NO.	Code	Description					
APT3100	LFC	Flush Diaphragm Seal and Capillary Type Transmitter (Two Remote Seal)					
Ranges	4	0-194 to 0-3800mmH2O (0-1.9 to 0-37.3 KPa)					
	5	0-960 to 0-19000mmH2O (0-9.4 to 0-186.5 KPa)					
	6	0-3518 to 0-70000mmH2O (0-34.5 to 0-690 KPa)					
	X	Special					
Mounting Flange Size / Material		ANSI		DIN		JIS	
	S2	2-inch	SST	DN 50	SST	50 A	SST
	S3	3-inch	SST	DN 80	SST	80 A	SST
	S4	4-inch	SST	DN 100	SST	100 A	SST
	SX	Special	SST	Special	SST	Special	SST
Mounting Flange Rating		ANSI		DIN		JIS	
		A1	Class 150	D1	PN 10/16	J1	10 K
		A2	Class 300	D2	PN 25/40	J2	20 K
		A3	Class 600	-	-	-	-
		AX	Special	DX	Special	JX	Special
Wetted Parts Material Diaphragm / Others		DIAPHRAGM			OTHERS		
	S	316L SST			316L SST		
	P	316L SST + Teflon			316L SST		
	H	Hastelloy C-276			316L SST		
	T	Tantalum			316L SST		
	X	Special			Special		
Fill Fluid		FILL FLUID			TEMPERATURE LIMITS		
	2	D.C Silicone 200			-45 to 205 °C (-49 to 400 °F)		
	7	D.C Silicone 704			0 to 315℃ (32 to 600 °F)		
	X	Special			Special		
Capillary Length	□□	Capillary Length from 1 to 12m Exp: 01 --> 1m, 10-->10m					
Materials of Construction	SS	FLANGE			VENT / DRAIN VALVE		
		316 SST			316 SST		
Electrical Connection	1	1/2"-14NPT F					
	2	G1/2					
	X	Special					
Hazardous Locations Certifications	K0	Maker Standard (Waterproof : IP67 / NEMA 4X)					
	K1	KCs Flameproof			*K2	KCs Intrinsic Safety	
	E1	ATEX Flameproof			E2	ATEX Intrinsic Safety	
	F1	FM & FM Canada Explosion proof			*F2	FM & FM Canada Intrinsic Safety	
Option	M1	LCD Indicator (5-Digit)			LPI	Lightning Protector (Internal)	
	BA	SST Bracket (Angle Type) with Bolts & Nuts			K	Oil Free Finish	
	BF	SST Bracket (Flat Type) with Bolts & Nuts			ST	Stainless Steel Housing	
	A	Vaccum Service			X	Special Order	

Note : Request to manufacturer for Draft Range, Absolute (Small Pressure and Vaccum) and items marked "*" before order.

Dimensional Drawing (mm)

For Extended Diaphragm Seal and Capillary Type Transmitter

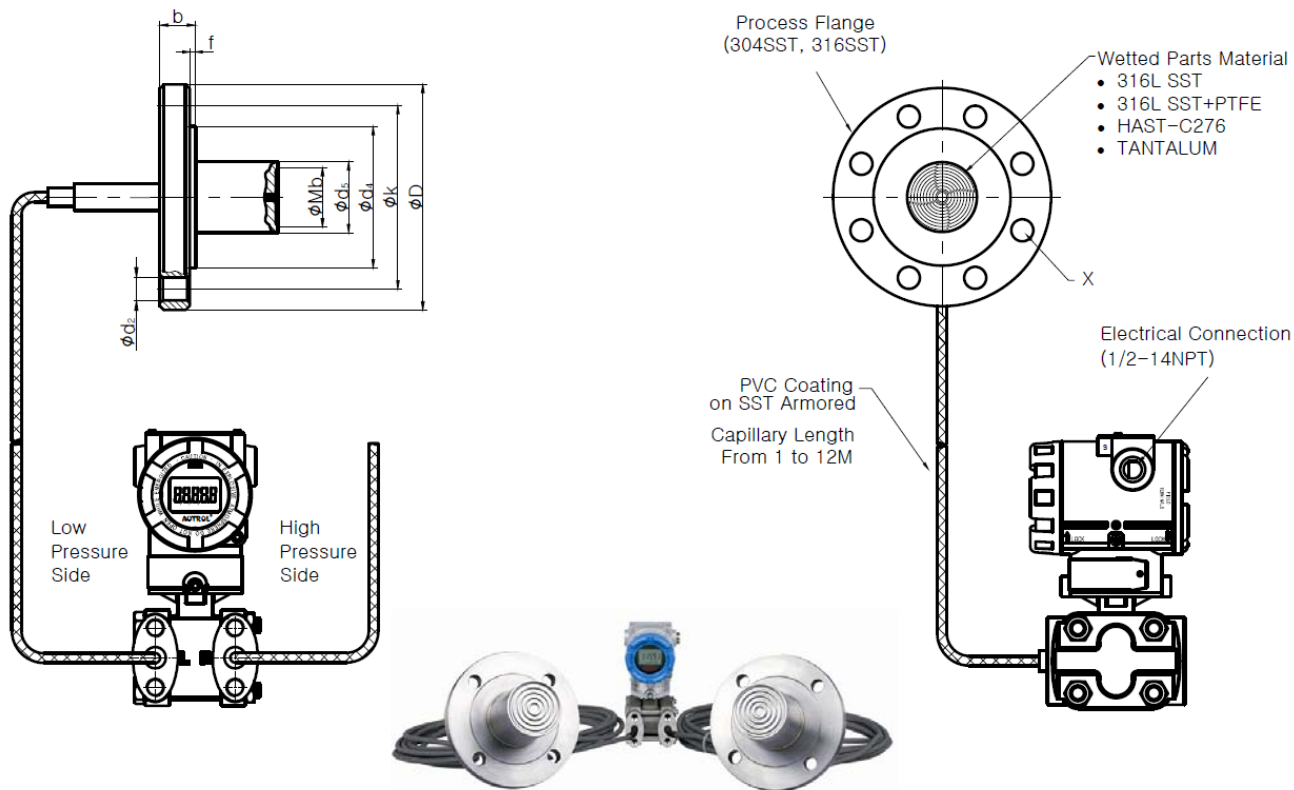

Flange Size: 100mm (4 inch)

Unit : mm

Flange Rating	Mb	D	b	d2	k	f	d4	d5	X
ANSI Class 150	89	229	24	19	190	1.5	157	89	8
ANSI Class 300		254	32	22	200				
JIS 10K	89	210	18	19	175	2	157	89	8
JIS 20K		225	24	23	185				
DIN PN 10/16	89	220	20	18	180	3	157	89	8
DIN PN 25/40		235	24	22	190				

Flange Size: 80mm (3 inch)

Unit : mm

Flange Rating	Mb	D	b	d2	k	f	d4	d5	X
ANSI Class 150	76	190	24	19	152.5	1.5	127	76	4
ANSI Class 300		210	29	22	168.5				8
JIS 10K	76	185	18	19	150	2	127	76	8
JIS 20K		200	22	23	160				
DIN PN 10/16	76	200	20	18	160	3	138	76	8
DIN PN 25/40			24	22					

Flange Size: 50mm (2 inch)

Unit : mm

Flange Rating	Mb	D	b	d2	k	f	d4	d5	X
ANSI Class 150	48	152	19	19	120.5	1.5	92	48	4
ANSI Class 300		165	22		127				8
JIS 10K	48	155	16	19	120	2	96	48	4
JIS 20K			18						8
DIN PN 10/16	48	165	20	18	125	3	102	48	4
DIN PN 25/40									


Ordering Information

MODEL NO.	Code	Description					
APT3100	LEC	Extended Diaphragm Seal and Capillary Type Transmitter (Two Remote Seal)					
Ranges	4	0-194 to 0-3800mmH2O (0-1.9 to 0-37.3 KPa)					
	5	0-960 to 0-19000mmH2O (0-9.4 to 0-186.5 KPa)					
	6	0-3518 to 0-70000mmH2O (0-34.5 to 0-690 KPa)					
	X	Special					
Mounting Flange Size / Material		ANSI		DIN		JIS	
	S2	2-inch	SST	DN 50	SST	50 A	SST
	S3	3-inch	SST	DN 80	SST	80 A	SST
	S4	4-inch	SST	DN 100	SST	100 A	SST
	SX	Special	SST	Special	SST	Special	SST
Mounting Flange Rating		ANSI		DIN		JIS	
		A1	Class 150	D1	PN 10/16	J1	10 K
		A2	Class 300	D2	PN 25/40	J2	20 K
		A3	Class 600	-	-	-	-
		AX	Special	DX	Special	JX	Special
Extension Length	□□	□□ x 10 mm Exp: 15 --> 150mm, 12--> 120mm					
Wetted Parts Material Diaphragm / Others		DIAPHRAGM			OTHERS		
	S	316L SST			316L SST		
	P	316L SST + Teflon			316L SST		
	H	Hastelloy C-276			316L SST		
	T	Tantalum			316L SST		
	X	Special			Special		
Fill Fluid		FILL FLUID			TEMPERATURE LIMITS		
	2	D.C Silicone 200			-45 to 205 °C (-49 to 400 °F)		
	7	D.C Silicone 704			0 to 315 °C (32 to 600 °F)		
	X	Special			Special		
Capillary Length	□□	Capillary Length from 1 to 12m Exp: 01 --> 1m, 10-->10m					
Materials of Construction	SS	FLANGE			VENT / DRAIN VALVE		
		316 SST			316 SST		
Electrical Connection	1	1/2"-14NPT F					
	2	G1/2					
	X	Special					
Hazardous Locations Certifications	K0	Maker Standard (Waterproof : IP67 / NEMA 4X)					
	K1	KCs Flameproof			*K2	KCs Intrinsic Safety	
	E1	ATEX Flameproof			E2	ATEX Intrinsic Safety	
	F1	FM & FM Canada Explosion proof			*F2	FM & FM Canada Intrinsic Safety	
Option	M1	LCD Indicator (5-Digit)			LPI	Lightning Protector (Internal)	
	BA	SST Bracket (Angle Type) with Bolts & Nuts			K	Oil Free Finish	
	BF	SST Bracket (Flat Type) with Bolts & Nuts			ST	Stainless Steel Housing	
	A	Vaccum Service			X	Special Order	

Note : Request to manufacturer for Draft Range, Absolute (Small Pressure and Vaccum) and items marked "*" before order.

Dimensional Drawing (mm)

For Flush Diaphragm Seal and
Capillary Type Transmitter

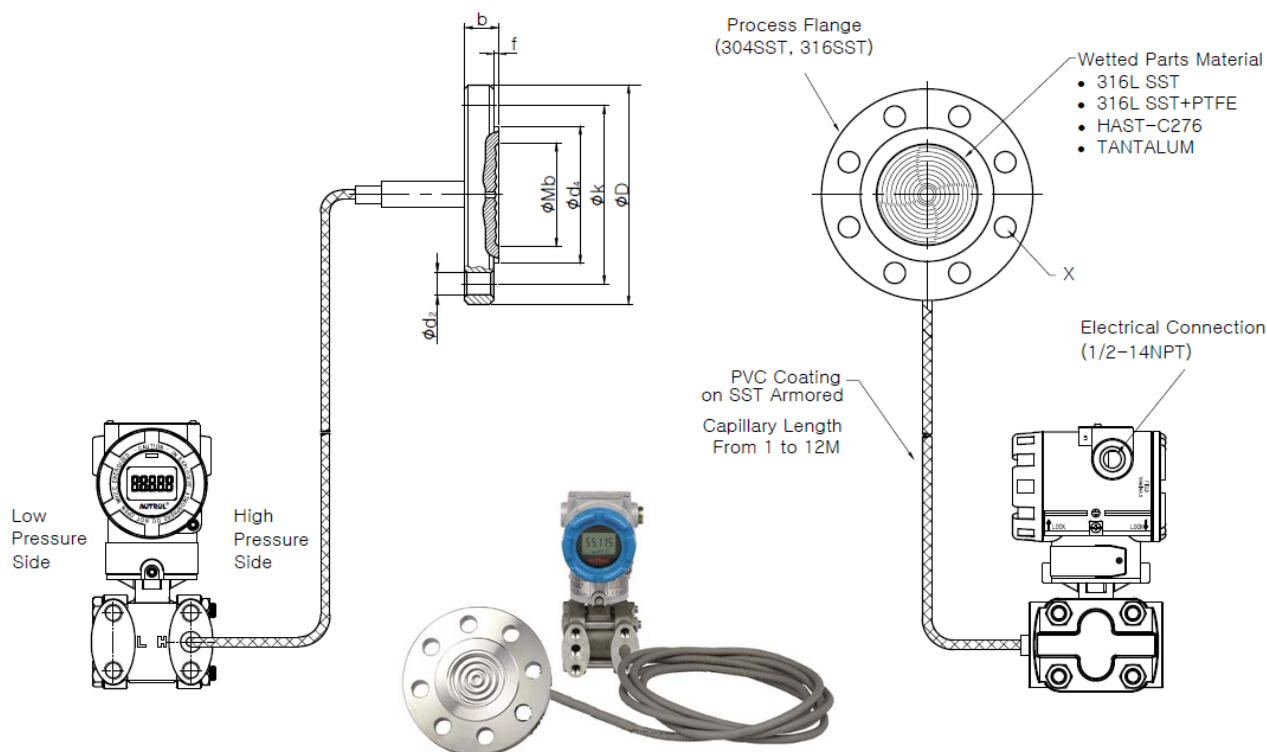

Flange Size: 100mm (4 inch)

Unit : mm

Flange Rating	Mb	D	b	d2	k	f	d4	X
ANSI Class 150	89	229	24	19	190	1.5	157	8
ANSI Class 300		254	32	22	200			
JIS 10K	89	210	18	19	175	2	157	8
JIS 20K		225	24	23	185			
DIN PN 10/16	89	220	20	18	180	3	157	8
DIN PN 25/40		235	24	22	190			

Flange Size: 80mm (3 inch)

Unit : mm

Flange Rating	Mb	D	b	d2	k	f	d4	X
ANSI Class 150	89	190	24	19	152.5	1.5	127	4
ANSI Class 300		210	29	22	168.5			8
JIS 10K	89	185	18	19	150	2	127	8
JIS 20K		200	22	23	160			
DIN PN 10/16	89	200	20	18	160	3	138	8
DIN PN 25/40			24	22				

Flange Size: 50mm (2 inch)

Unit : mm

Flange Rating	Mb	D	b	d2	k	f	d4	X
ANSI Class 150	61	152	19	19	120.5	1.5	92	4
ANSI Class 300		165	22		127			8
JIS 10K	61	155	16	19	120	2	96	4
JIS 20K			18					8
DIN PN 10/16	61	165	20	18	125	3	102	4
DIN PN 25/40								


Ordering Information

MODEL NO.	Code	Description					
APT3100	LFS	Flush Diaphragm Seal and Capillary Type Transmitter (One Remote Seal)					
Ranges	4	0-194 to 0-3800mmH2O (0-1.9 to 0-37.3 KPa)					
	5	0-960 to 0-19000mmH2O (0-9.4 to 0-186.5 KPa)					
	6	0-3518 to 0-70000mmH2O (0-34.5 to 0-690 KPa)					
	X	Special					
Mounting Flange Size / Material		ANSI		DIN		JIS	
	S2	2-inch	SST	DN 50	SST	50 A	SST
	S3	3-inch	SST	DN 80	SST	80 A	SST
	S4	4-inch	SST	DN 100	SST	100 A	SST
	SX	Special	SST	Special	SST	Special	SST
Mounting Flange Rating		ANSI		DIN		JIS	
		A1	Class 150	D1	PN 10/16	J1	10 K
		A2	Class 300	D2	PN 25/40	J2	20 K
		A3	Class 600	-	-	-	-
		AX	Special	DX	Special	JX	Special
Wetted Parts Material Diaphragm / Others		DIAPHRAGM			OTHERS		
	S	316L SST			316L SST		
	P	316L SST + Teflon			316L SST		
	H	Hastelloy C-276			316L SST		
	T	Tantalum			316L SST		
	X	Special			Special		
Fill Fluid		FILL FLUID			TEMPERATURE LIMITS		
	2	D.C Silicone 200			-45 to 205 °C (-49 to 400 °F)		
	7	D.C Silicone 704			0 to 315°C (32 to 600 °F)		
	X	Special			Special		
Capillary Length	□□	Capillary Length from 1 to 12m Exp: 01 --> 1m, 10-->10m					
Materials of Construction	SS	FLANGE			VENT / DRAIN VALVE		
		316 SST			316 SST		
Low Side	W	Without Process Adapter					
	N	With 1/2"-14 NPT F Process Adapter (316 SST)					
	C	Closed					
	X	Special					
Electrical Connection	1	1/2"-14NPT F					
	2	G1/2					
	X	Special					
Hazardous Locations Certifications	K0	Maker Standard (Waterproof : IP67 / NEMA 4X)					
	K1	KCs Flameproof			*K2	KCs Intrinsic Safety	
	E1	ATEX Flameproof			E2	ATEX Intrinsic Safety	
	F1	FM & FM Canada Explosion proof			*F2	FM & FM Canada Intrinsic Safety	
Option	M1	LCD Indicator (5-Digit)			LPI	Lightning Protector (Internal)	
	BA	SST Bracket (Angle Type) with Bolts & Nuts			K	Oil Free Finish	
	BF	SST Bracket (Flat Type) with Bolts & Nuts			ST	Stainless Steel Housing	
	A	Vaccum Service			X	Special Order	

Note : Request to manufacturer for Draft Range, Absolute (Small Pressure and Vacuum) and items marked "*" before order.

Dimensional Drawing (mm)

For Extended Diaphragm Seal and Capillary Type Transmitter

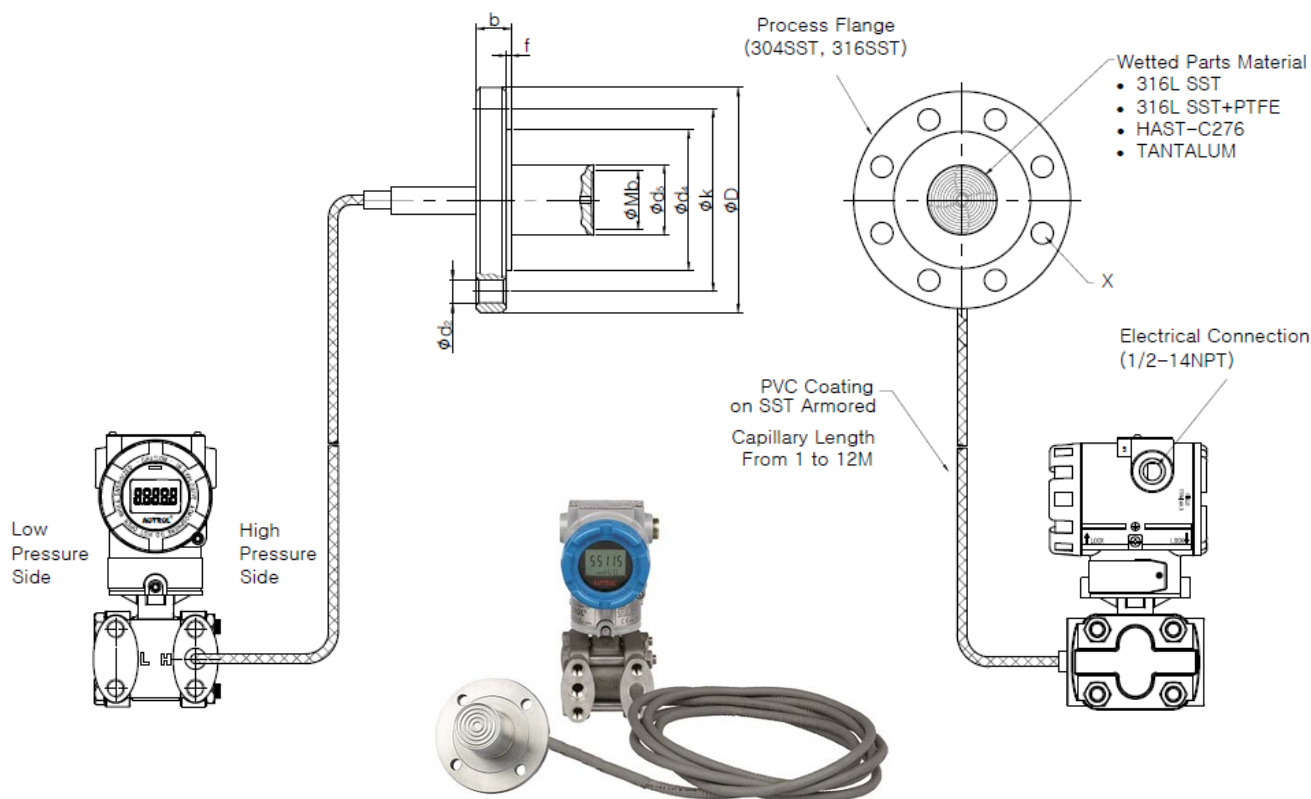

Flange Size: 100mm (4 inch)

Unit : mm

Flange Rating	Mb	D	b	d2	k	f	d4	d5	X
ANSI Class 150	89	229	24	19	190	1.5	157	89	8
ANSI Class 300		254	32	22	200				
JIS 10K	89	210	18	19	175	2	157	89	8
JIS 20K		225	24	23	185				
DIN PN 10/16	89	220	20	18	180	3	157	89	8
DIN PN 25/40		235	24	22	190				

Flange Size: 80mm (3 inch)

Unit : mm

Flange Rating	Mb	D	b	d2	k	f	d4	d5	X
ANSI Class 150	76	190	24	19	152.5	1.5	127	76	4
ANSI Class 300		210	29	22	168.5				8
JIS 10K	76	185	18	19	150	2	127	76	8
JIS 20K		200	22	23	160				
DIN PN 10/16	76	200	20	18	160	3	138	76	8
DIN PN 25/40			24	22					

Flange Size: 50mm (2 inch)

Unit : mm

Flange Rating	Mb	D	b	d2	k	f	d4	d5	X
ANSI Class 150	48	152	19	19	120.5	1.5	92	48	4
ANSI Class 300		165	22		127				8
JIS 10K	48	155	16	19	120	2	96	48	4
JIS 20K			18						8
DIN PN 10/16	48	165	20	18	125	3	102	48	4
DIN PN 25/40									

Ordering Information

MODEL NO.	Code	Description					
APT3100	LES	Extended Diaphragm Seal and Capillary Type Transmitter (One Remote Seal)					
Ranges	4	0-194 to 0-3800mmH2O (0-1.9 to 0-37.3 KPa)					
	5	0-960 to 0-19000mmH2O (0-9.4 to 0-186.5 KPa)					
	6	0-3518 to 0-70000mmH2O (0-34.5 to 0-690 KPa)					
	X	Special					
Mounting Flange Size / Material		ANSI		DIN		JIS	
	S2	2-inch	SST	DN 50	SST	50 A	SST
	S3	3-inch	SST	DN 80	SST	80 A	SST
	S4	4-inch	SST	DN 100	SST	100 A	SST
	SX	Special	SST	Special	SST	Special	SST
Mounting Flange Rating		ANSI		DIN		JIS	
		A1	Class 150	D1	PN 10/16	J1	10 K
		A2	Class 300	D2	PN 25/40	J2	20 K
		A3	Class 600	-	-	-	-
		AX	Special	DX	Special	JX	Special
Extension Length	□□	□□ x 10 mm Exp: 15 --> 150mm, 12--> 120mm					
Wetted Parts Material Diaphragm / Others		DIAPHRAGM			OTHERS		
	S	316L SST			316L SST		
	P	316L SST + Teflon			316L SST		
	H	Hastelloy C-276			316L SST		
	T	Tantalum			316L SST		
X	Special			Special			
Fill Fluid		FILL FLUID			TEMPERATURE LIMITS		
	2	D.C Silicone 200			-45 to 205 °C (-49 to 400 °F)		
	7	D.C Silicone 704			0 to 315°C (32 to 600 °F)		
	X	Special			Special		
Capillary Length	□□	Capillary Length from 1 to 12m Exp: 01 --> 1m, 10-->10m					
Materials of Construction	SS	FLANGE			VENT / DRAIN VALVE		
		316 SST			316 SST		
Low Side	W	Without Process Adapter					
	N	With 1/2"-14 NPT F Process Adapter (316 SST)					
	C	Closed					
	X	Special					
Electrical Connection	1	1/2"-14NPT F					
	2	G1/2					
	X	Special					
Hazardous Locations Certifications	K0	Maker Standard (Waterproof : IP67 / NEMA 4X)					
	K1	KCs Flameproof			*K2	KCs Intrinsic Safety	
	E1	ATEX Flameproof			E2	ATEX Intrinsic Safety	
	F1	FM & FM Canada Explosion proof			*F2	FM & FM Canada Intrinsic Safety	
Option	M1	LCD Indicator (5-Digit)			LPI	Lightning Protector (Internal)	
	BA	SST Bracket (Angle Type) with Bolts & Nuts			K	Oil Free Finish	
	BF	SST Bracket (Flat Type) with Bolts & Nuts			ST	Stainless Steel Housing	
	A	Vaccum Service			X	Special Order	

Note : Request to manufacturer for Draft Range, Absolute (Small Pressure and Vaccum) and items marked "*" before order.

Smart Transmitter with Diaphragm Seal**Direct Mount Type****APT3100LFD / LED****Two Remote Type****APT3100LFC / LEC****One Remote Type****APT3100LFS / LES**